

LED 350 HIW

High intensity LED light
for large floating stations

LED 350 HIW is a high intensity
LED beacon for ranges up to
12 nautical miles. It is designed
for floating stations where a
vertical beam typical for a buoy
light is required.



Lantern optics with a wide vertical divergence



LED 350 HIW

- High intensity compared to standard buoy lights
- Wide vertical divergence suitable for large floating stations like light ships, LANBY's, elastic beacons, etc
- Can be supplied with up to 3 tiers, giving a 4.500 cd luminous intensity white
- Standard IALA colours Red, Green, White, Yellow
- Rugged aluminium housing for installation in marine environment
- Suitable for solar and battery operation
- Integrated flasher with day light switch and a 16 ampere solar panel charger
- Field adjustable intensity and range
- Optionally integrated GPS synchronization
- Optionally integrated GSM Remote monitoring



High Power LEDs

Each tier consists of 42 high power LEDs all equipped with their own secondary lens producing a uniform horizontal output.



Sabik Easy Programmer

User friendly and compact wireless two-way programmer.



PDA Programmer

Wireless two-way communication using a Windows based PDA with infra red port. Flash code, range and photocell switch level etc. can be set. The Programmer can also retrieve the Event Log.



Installation

The bottom plate of the LED 350 HIW supports installation on structure using 3 x M12 bolts or 4 x M12 bolts on a 200 mm radius. PTFE breathing vent for pressure release.



Additional cable entry

Equipped as standard with two cable entries. If a secondary entry is needed, e.g. for a solar module, a standard M20 cable gland can be fitted.



Bird spikes

Stainless steel bird deterrents as standard. Easy to replace. Offers great protection against large birds like cormorants. Spike designed to prevent injury to service technicians.



Level indicator


The lantern can easily be levelled in field using the integrated bubble level indicator.



Grounding plug

The base plate has a grounding plug as standard to enable good protection against electromagnetic interference.

Technical Specification LED 350 HIW

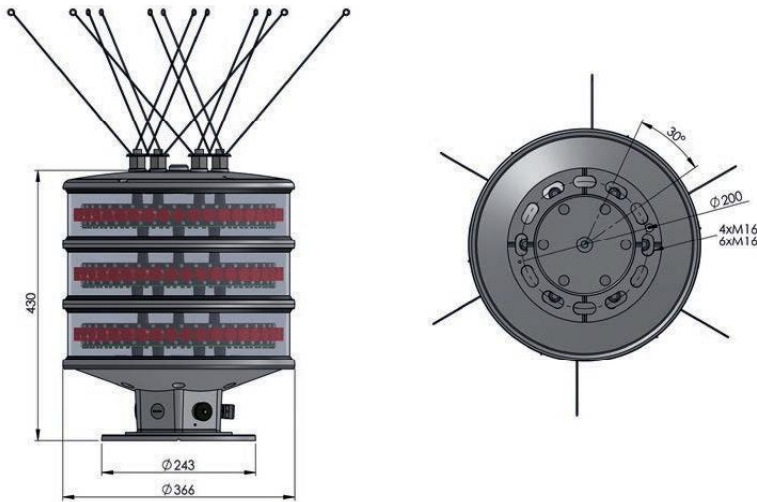

Optical performance

| Maximum fixed luminous intensity | | | | |
|----------------------------------|----------|----------|----------|----------|
| 1-tier, 50 W | 600 cd | 900 cd | 1.100 cd | 600 cd |
| 2-tiers, 100 W | 1.200 cd | 1.800 cd | 2.200 cd | 1.200 cd |
| 3-tiers, 150 W | 1.800 cd | 2.700 cd | 3.300 cd | 1.800 cd |

Main Technical Specification

| | |
|---------------------------------|--|
| Lens visual/Mechanical diameter | 350 mm |
| Lens material | UV stabilized Polycarbonate |
| Light source | High Power Light Emitting Diodes (LEDs) |
| Vertical divergence | 10° @ 50 % (±1°) and 18° @ 10 % (±2°) of peak intensity |
| Unit lifetime | Up to 10 years |
| Weight | 10 kg for single tier unit, add 4 kg for each tier |
| Temperature range | -40°...+60°C |
| Supply Voltage | 9 – 30 VDC |
| Solar panel charger | 16 ampere PWM charger. Solar panel production (Ah) is logged |
| Power consumption | 50 watts/tier |
| Degree of protection | IP 67 |

Order Overview LED 350 HIW

Option matrix

| | |
|-------------------------|--|
| LightGuard GSM | Integrated GSM based monitoring including GSM antenna |
| LightGuard GSM + GPS | Integrated GSM based monitoring including GSM/GPS antennas |
| GPS sync | Integrated GPS sync only unit including GPS antenna in lantern top |
| Optical Feedback System | Integrated LED performance measurement |
| External baffles | External baffles when unit is supplied with coloured sectors |

For Monitoring we recommend LightGuard Basic.

Product codes

| LED 350 HIW 1 LAYER | LED 350 HIW 2 LAYER | LED 350 HIW 3 LAYER | Colour |
|------------------------|------------------------|------------------------|--------|
| 980224HIW | 980228HIW | 980232HIW | white |
| 980221HIW | 980225HIW | 980230HIW | red |
| 980223HIW | 980227HIW | 980233HIW | green |
| 980222HIW | 980226HIW | 980231HIW | yellow |