

Precision Approach Path Indicator (PAPI)

The LED PAPI is the most advanced on the market and has a wide range of configurations:

- Visible and IR output
- Portable and permanent
- ICAO / FAA / STANAG Compliant
- Several power options

Applications

- Permanent and temporary airfields
- Emergency helipads
- Military & NVG operations

Advanced Optics

The PAPI and Abbreviated PAPI (APAPI) use patented, LED-based optics to achieve the lowest power consumption, highest intensity and sharpest white/red transition. It exceeds ICAO / FAA / STANAG requirements to provide a clear approach path to the aviator.

Easy Installation

The PAPI works equally well in permanent and temporary locations. Permanent mounting is easy with standard frangible mounting. Temporary deployment is fast with retractable legs and a lightweight, compact form factor. LED keypad and LED indicators designed for use with gloves. Removable, replaceable antenna.

Power Supply Versatility

The low power consumption of the PAPI makes it mate well with several available power supplies:


- Solar kit
- Generator kit
- Battery kit
- AC only

Controllable

Optional wireless control provides on-demand operation from up to 2.5 miles (4 km) away. There is also 3 and 5-step, wired control and local control available.

Trusted

Deployed around the globe, from military to civilian airfields and the Middle East to the Arctic Circle, the PAPI has proven its robustness.

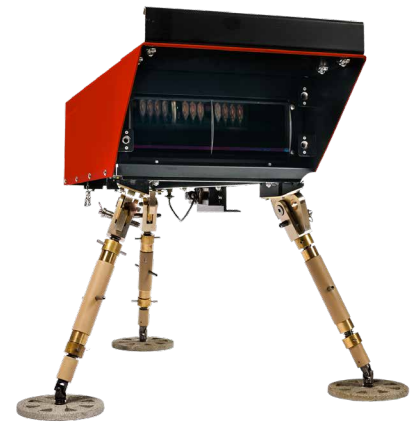

PAPI


SPECIFICATIONS

Compliance	FAA L-880/881 & E-3007 (2 & 4 LHA)
	ICAO Annex 14 PAPI (2 & 4 LHA) & APAPI (2 LHA) STANAG 3316 PAPI (2 & 4 LHA) & APAPI (2 LHA) UFC 3-535-01 (4 LHA)
Optical	High-powered LEDs with heat management ensure consistent photometrics for life of product NVG-compatible infrared (IR) LEDs
Power Options	Solar kit: Solar panels and mounting, batteries and enclosures; air transportable container; AC input for backup
	Generator kit: Gas or diesel generator; AC input for backup
	Battery kit: Batteries & enclosures; AC input for backup
	AC only: 100-240 VAC 50/60 Hz; 3 and 5-step current input
Control Options	Ultra-low, 55W / LHA power consumption make solar possible
	Non-wireless: AC input of 3 and 5-step current; local control Wireless: 2.5 miles (4 km) control range with optional Handheld Controller; local control
Construction	Powder-coated aluminum chassis with integrated handles
	Aviation orange standard, yellow and other colors available
	Stainless steel and anodized aluminum hardware
	Integrated digital level
Temperature	Optical glass lens
Temperature	-40 to 140°F (-40 to 60°C) ambient
Wind Loading	161 kph (100 mph)
Ingress	NEMA 4 & EN 60529 IP 55 (IP 66 available with marine upgrade kit)
LHA Weight	12.7 kg (28 lbs)


CONFIGURATION

Model	Size	Mounting	Output	Power	Control
PAPI	Abbreviated 2 LHA Standard 2 LHA Standard 4 LHA	Permanent Portable	Visible Visible/IR	Solar Kit Generator Kit Battery Kit AC	Non-wireless Wireless Wired, style B

Options: Handheld Controller, carrying case, tactical battery pack, tilt switch (for FAA), low temperature arctic kit, custom chassis color




- 2.5 miles (4 km) control range
- 2.4 GHz or 900 MHz with encrypted signal
- Control 8 groups of lights independently




DIMENSIONS


Permanent

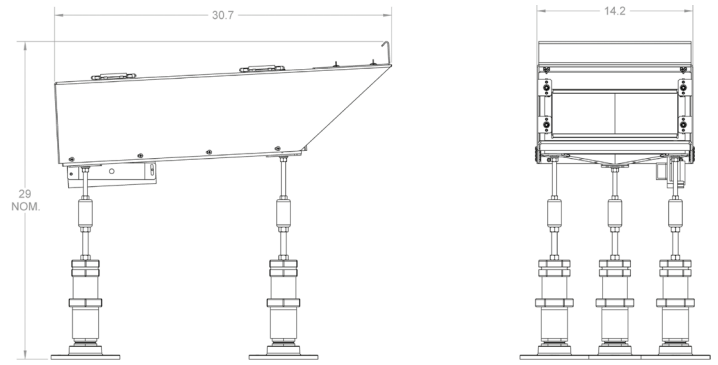

Portable

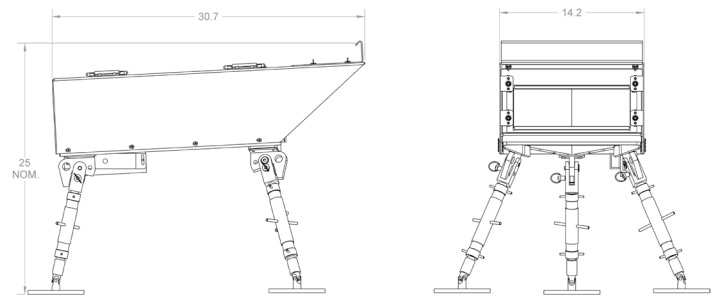

PAPI ISOCANDELA - PHOTOMETRICS

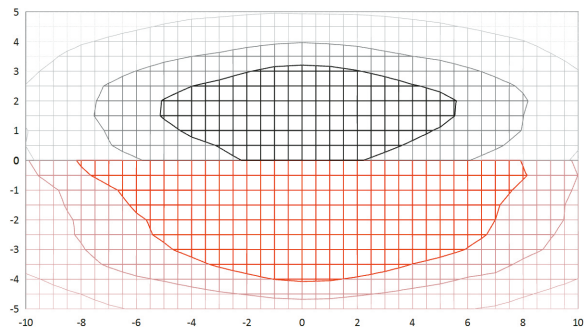

WHITE (cd)

- 0 - 10000
- 10000 - 20000
- 20000 - 30000
- 30000+

RED (cd)

- 0 - 5000
- 5000 - 10000
- 10000 - 15000
- 15000+

FLASH TECHNOLOGY

flashsales@spx.com | flashtechnology.com/airfield | 1.615.503.2000

©2019 Flash Technology. All rights reserved. Data and specifications subject to change without notification. ISO 9001:2015. DPAPI-01 Rev A